

# XCSRZE

M12 plug for XCSRC Daisy Chain models,  
Telemecanique Safety switches XCS,  
Loopback device



## Main

Range of product	Telemecanique Safety switches XCS
Accessory / separate part category	RFID accessory
Accessory / separate part type	Loopback device

## Complementary

Product or component type	M12 plug for XCSRC Daisy-Chain models
Accessory / separate part destination	RFID safety switch
Product compatibility	XCSRC.2M12
Net weight	0.02 kg

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.800 cm
Package 1 Width	7.500 cm
Package 1 Length	7.800 cm
Package 1 Weight	16.000 g
Unit Type of Package 2	S01
Number of Units in Package 2	24
Package 2 Height	15 cm
Package 2 Width	15 cm
Package 2 Length	40 cm
Package 2 Weight	544.000 g


## Offer Sustainability

Sustainable offer status	Green Premium product
Circularity Profile	No need of specific recycling operations
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

---

Dimensions


---



## Connections

### Wiring Diagram: Series Connection

Cat. 4 / PL=e (EN/ISO 13849-1) / SIL3 (IEC 61508) / SILCL3 IEC 62061), if combined with an appropriate Preventa XPS Safety module  
PL=e / SIL3

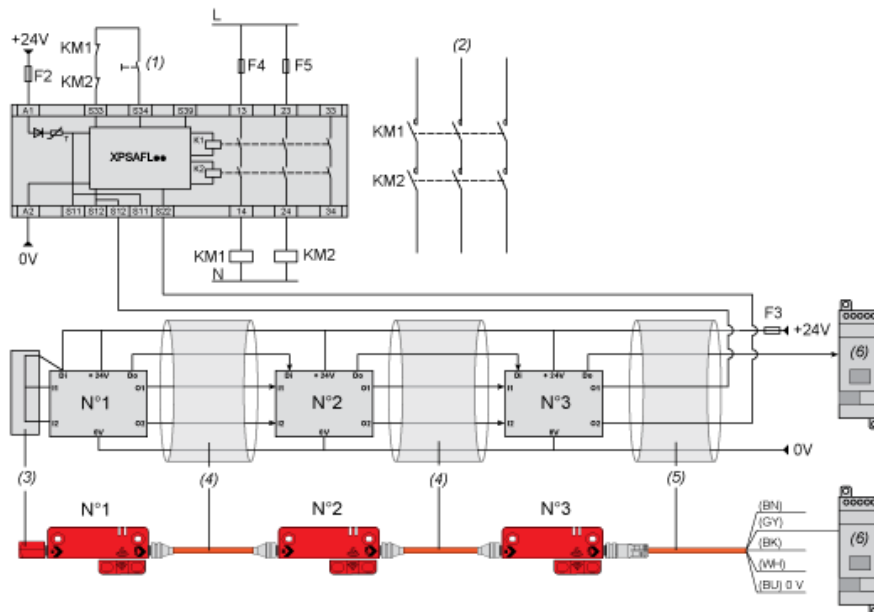

- (1) Start
- (2) Power circuit
- (3) Loopback device
- (4) M12/M12 female jumpers
- (5) Pre-wired female connectors
- (6) Diagnostic module (option)

NOTE: KM1 and KM2 contactors must have force-guided contacts.