


XGSZ12E4510

Ethernet copper cable, Radio frequency identification XG, M12 D coded to RJ45, 10 m

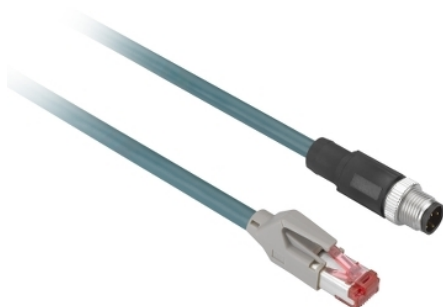

Main

Range of product	Telemecanique Radio frequency identification XG
Accessory / separate part categor	Connection accessories
Accessory / separate part type	Connecting cable
Product or component type	Ethernet copper cable
Product compatibility	XGSZ33EIP XGSZ33ETH XUW
Accessory / separate part destination	Ethernet network

Complementary

Cable length	10 m
Transmission rate	100 Mbit/s
Transmission support medium	2 twisted shielded pairs
Communication network category	5e
AWG gauge	AWG 26
Electrical connection	1 male connector, M12 straight connector with 4 pin(s) - encoding type: D coding 1 male connector, RJ45 straight connector with 4 pin(s)
Conductor material	Copper
Cover material	PUR
Net weight	0.43 kg

Environment

IP degree of protection	IP67
Standards	ISO/IEC 11801 Ed.2, 2002 IEC 60754-1 EIA/TIA-568

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.000 cm
Package 1 Width	21.000 cm
Package 1 Length	21.000 cm
Package 1 Weight	458.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	4
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	2.126 kg

Offer Sustainability

California proposition 65

WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

For all Reach Rohs enquiries contact us at

sustainability@tesensors.com

Wiring Diagram

