


# XGSZ22E4510

Ethernet copper cable, Radio frequency identification XG, Jumper M12/RJ45 straight/ elbowed shielded 10 m

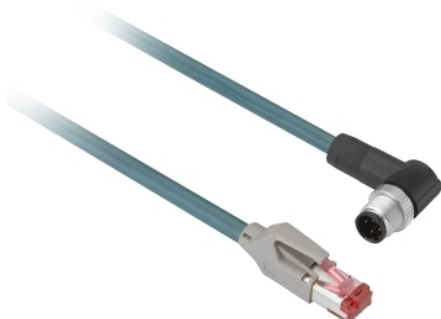

## Main

Range of product	Telemecanique Radio frequency identification XG
Accessory / separate part categor	Connection accessories
Accessory / separate part type	Connecting cable
Product or component type	Ethernet copper cable
Product compatibility	XGSZ33ETH XUW XGSZ33EIP
Accessory / separate part destination	Ethernet network

## Complementary

Cable length	10 m
Transmission rate	100 Mbit/s
Transmission support medium	2 twisted shielded pairs
Communication network category	5e
AWG gauge	AWG 26
Electrical connection	1 male connector, RJ45 straight connector with 4 pin(s) 1 male connector, M12 elbowed connector with 4 pin(s) - encoding type: D coding
Conductor material	Copper
Cover material	PUR
Net weight	0.43 kg

## Environment

IP degree of protection	IP67
Standards	EIA/TIA-568 IEC 60754-1 ISO/IEC 11801 Ed.2, 2002

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.000 cm
Package 1 Width	18.000 cm
Package 1 Length	19.000 cm
Package 1 Weight	471.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	4
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	2.118 kg

## Offer Sustainability

California proposition 65

WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

For all Reach Rohs enquiries contact us at

[sustainability@tesensors.com](mailto:sustainability@tesensors.com)

## Wiring Diagram

