Product data sheet
Characteristics

XMLEZ010

local display - for electronic pressure sensor 10 bar

Main

Accessory / separate part type	Display
Display type	Digital display
Operating position	Any position
Product compatibility	XMLE analogue pressure sensors 0…10 bar, connector type: EN 175301-803-A (ex DIN43650) XMLP analogue pressure sensors, connector type: EN 175301-803-A (ex DIN43650)

Complementary

Net weight	0.1 kg
Height	66 mm
Depth	40 mm
Width	92 mm

Environment

Protective treatment	TC
IP degree of protection	IP65 conforming to EN/IEC 60529
Vibration resistance	35 gn (f = 60…2000 Hz) 5 gn (f = 25…200 Hz)
Ambient air temperature for operation	-15…80 °C
Standards	CE EN 50081 EN 50082
Product certifications	CSA[RETURN]UL

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.6 cm
Package 1 Width	11.5 cm
Package 1 Length	9.3 cm
Package 1 Weight	123 g

Offer Sustainability

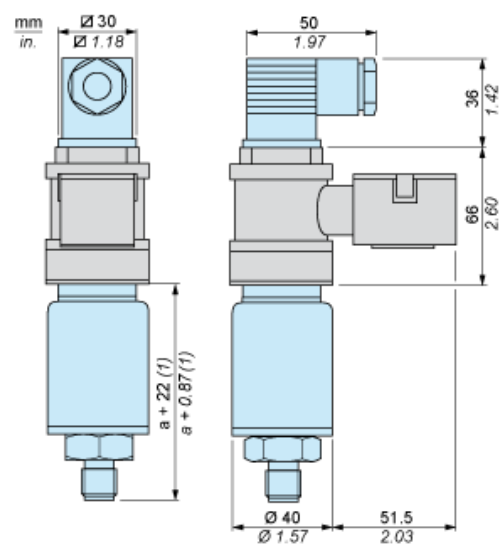|	
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
For all Reach Rohs enquiries contact us at	sustainability@tesensors.com

Contractual warranty

Warranty	18 months

Dimensions

(1)   a = 65

Telemecanique
Sensors