


XSDN501229H4

inductive sensor XSD 80x80x40 - plastic -
Sn40mm - 24..240VAC - terminals

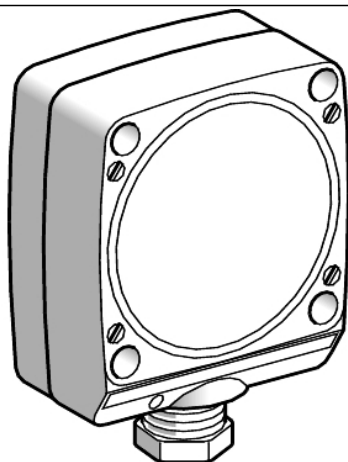

Main

Range of product	Telemecanique Inductive proximity sensors XS
Series name	General purpose
Sensor type	Inductive proximity sensor
Sensor name	XSD
Sensor design	Form 80 x 80 x 40
Size	40 mm
Body type	Fixed
Enclosure material	Plastic
Type of output signal	Discrete
Wiring technique	2-wire
Discrete output function	1 NO or 1 NC programmable
Electrical connection	Screw-clamp terminals
[Us] rated supply voltage	12...240 V AC
IP degree of protection	IP67

Complementary

Detection face	Frontal
Detector flush mounting acceptance	Non flush mountable
Material	Plastic
Front material	Plastic
Output circuit type	AC
Cable entry	1 entry tapped for 1/2" NPT cable gland
Switching capacity in mA	5...500 mA
Switching frequency	<= 10 Hz
Marking	CE
Depth	40 mm
Height	100 mm
Width	80 mm
Net weight	0.48 kg

Environment

Product certifications	CCC
Ambient air temperature for operation	-25...70 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.1 cm
Package 1 Width	4 cm
Package 1 Length	8.2 cm
Package 1 Weight	480 g

Offer Sustainability

For all Reach Rohs enquiries contact us at	sustainability@tesensors.com
--------------------------------------------	------------------------------