


# XSDT023319H7

inductive sensor XSD 80x80x40 - plastic -  
Sn40mm - 24..240VAC - terminals

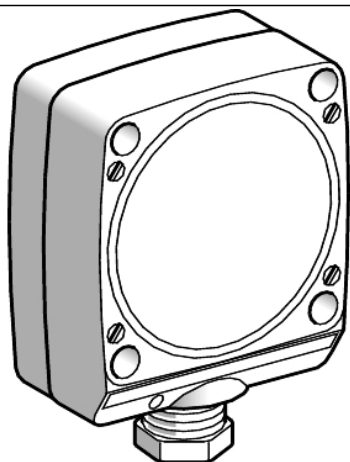

## Main

Range of product	Telemecanique Inductive proximity sensors XS
Series name	General purpose
Sensor type	Inductive proximity sensor
Sensor name	XSD
Sensor design	Form 80 x 80 x 40
Size	40 mm
Body type	Fixed
Enclosure material	Plastic
Type of output signal	Discrete
Wiring technique	2-wire
[Sn] nominal sensing distance	40 mm
Discrete output function	1 NO or 1 NC programmable
Electrical connection	Screw-clamp terminals
[Us] rated supply voltage	12...240 V AC
IP degree of protection	IP67

## Complementary

Detection face	Frontal
Detector flush mounting acceptance	Non flush mountable
Material	Plastic
Front material	Plastic
Output circuit type	AC
Cable entry	1 entry tapped for 1/2" NPT cable gland
Switching capacity in mA	5...500 mA
Switching frequency	<= 10 Hz
Marking	CE
Depth	40 mm
Height	100 mm
Width	80 mm
Net weight	0.48 kg

## Environment

Product certifications	CCC
Ambient air temperature for operation	-25...70 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither TWSS Holding nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.