

XUPH001

Communication module, Photoelectric sensors
XU, RJ45, Modbus TCP/IP smart box for
monitoring



Main

Range of product	Telemecanique Photoelectric sensors XU
Device short name	XUPH
Product or component type	Communication module

Complementary

Communication port protocol	Modbus TCP/IP
Product compatibility	Picking sensor
Connector type	RJ45
Number of connectors	8 for sensor(s) 2 for Modbus TCP/IP
[Us] rated supply voltage	24 V DC
Electrical connection	Screw terminal block for power supply
Local signalling	Ethernet network activity Ethernet network link
Width	45 mm
Height	185 mm
Depth	70 mm
Net weight	0.35 kg

Environment

Pollution degree	2
IP degree of protection	IP20 with protective cover

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.0 cm
Package 1 Width	20.2 cm
Package 1 Length	8.8 cm
Package 1 Weight	350.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	8
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	3.138 kg

Offer Sustainability


California proposition 65

WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

For all Reach Rohs enquiries contact us at


sustainability@tesensors.com

Dimensions

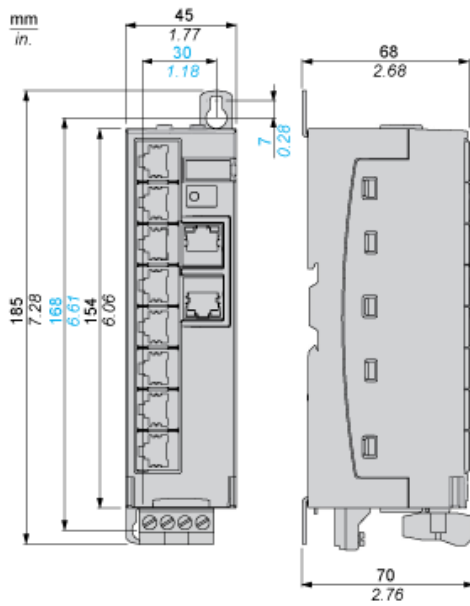

Mounting

Mounting on a Flat Panel

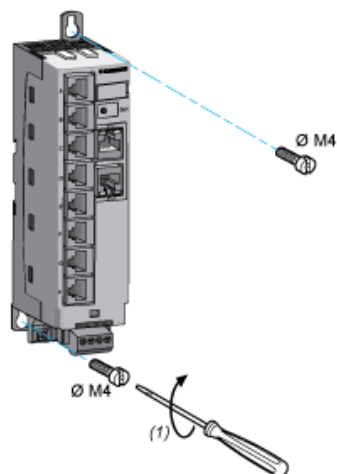

(1) Maximum tightening torque: 1,7 Nm / 15 lb-in.

Mounting on a Rail

