



### Main

Range of product	Telemecanique Safety light curtains XUSL
Accessory / separate part categor	Protection accessories
Accessory / separate part type	Protective screen
Product compatibility	XUSL.E...91
Accessory / separate part destination	Safety light curtain type 2 Safety light curtain type 4
Height	945 mm
Quantity per set	Set of 4

### Complementary

Material	Polycarbonate
Sensing distance reduction coefficient	0.97 Sn
Net weight	0.38 kg

### Environment

Resistance to chemical agents	Resistant aqueous solutions Resistant alkalis Resistant detergents and cleaners Resistant to inorganic diluted acids
Ambient air temperature for operation	-10...55 °C 14...131 °F
Ambient air temperature for storage	-13...158 °F -25...70 °C

### Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	14.5 cm
Package 1 Width	20.0 cm
Package 1 Length	107.0 cm
Package 1 Weight	1.533 kg
Unit Type of Package 2	P12
Number of Units in Package 2	20
Package 2 Height	112.0 cm
Package 2 Width	80.0 cm
Package 2 Length	120.0 cm
Package 2 Weight	47.0 kg

### Offer Sustainability

Sustainable offer status	Green Premium product
Toxic heavy metal free	Yes
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

## Mounting and Clearance

### Various Stages in the Protective Screen Assembly

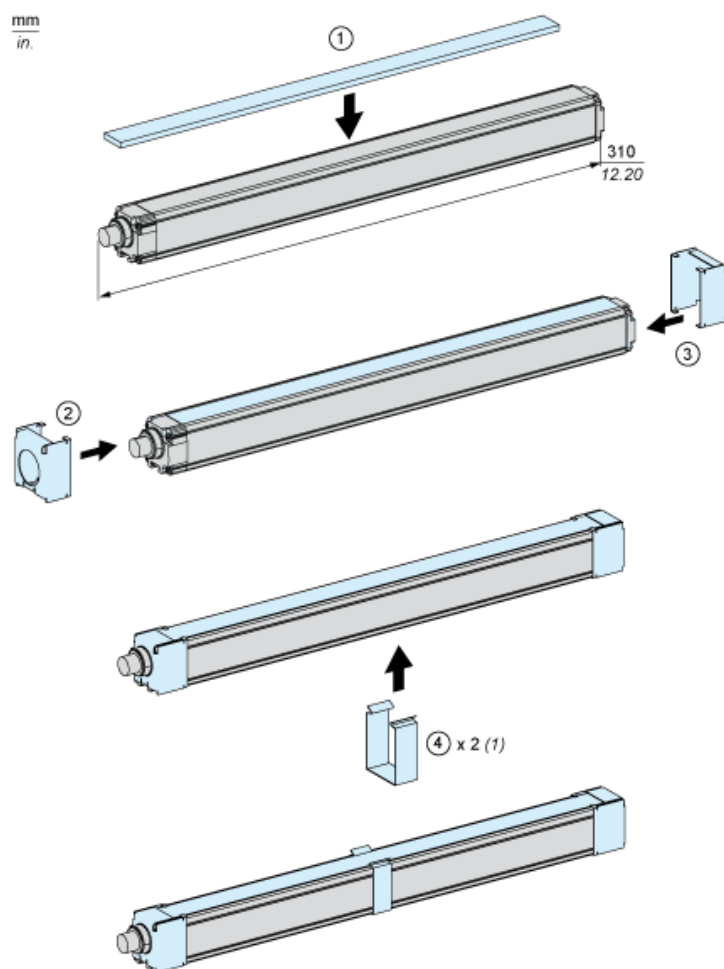

(1) Depending on the length