



### Main

Range of product	Telemecanique Safety light curtains XUSL
Accessory / separate part categor	Protection accessories
Accessory / separate part type	Protective screen
Product compatibility	XUSL.E...151
Accessory / separate part destination	Safety light curtain type 4 Safety light curtain type 2
Height	1545 mm
Quantity per set	Set of 4

### Complementary

Material	Polycarbonate
Sensing distance reduction coefficient	0.97 Sn
Net weight	0.62 kg

### Environment

Resistance to chemical agents	Resistant detergents and cleaners Resistant to inorganic diluted acids Resistant alkalis Resistant aqueous solutions
Ambient air temperature for operation	-10...55 °C 14...131 °F
Ambient air temperature for storage	-13...158 °F -25...70 °C

### Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	14.000 cm
Package 1 Width	19.500 cm
Package 1 Length	166.000 cm
Package 1 Weight	2.080 kg
Unit Type of Package 2	P2M
Number of Units in Package 2	60
Package 2 Height	90.000 cm
Package 2 Width	200.000 cm
Package 2 Length	120.000 cm
Package 2 Weight	139.800 kg

### Offer Sustainability

Sustainable offer status	Green Premium product
Toxic heavy metal free	Yes
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

## Mounting and Clearance

### Various Stages in the Protective Screen Assembly

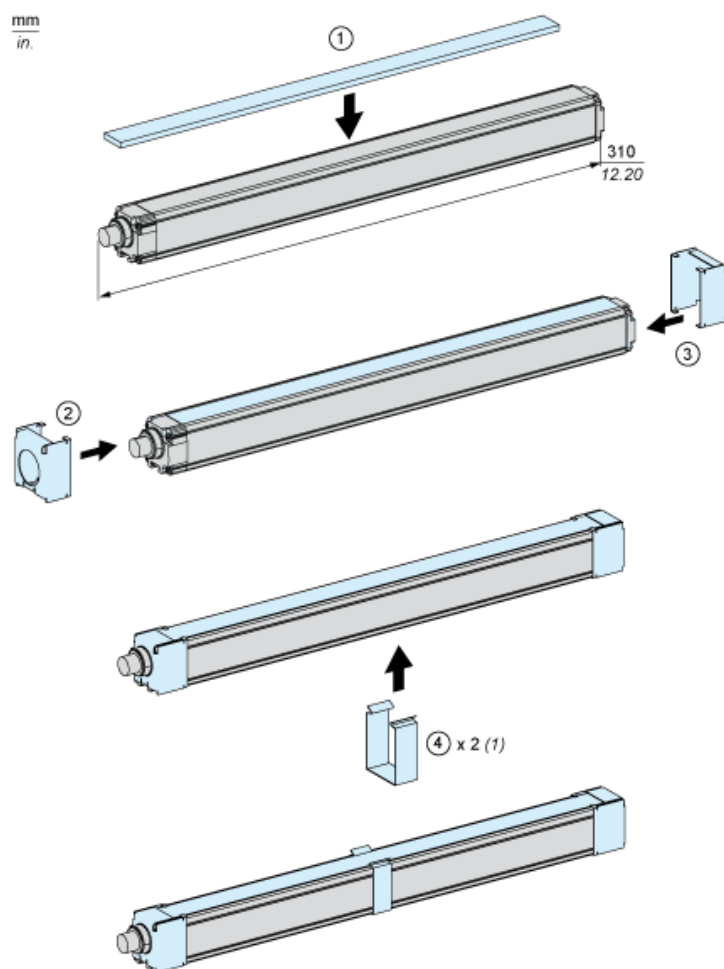

(1) Depending on the length