XUSZWPEFC

Telemecanique Safety light curtains XUSL, Fixation bracket for Protective screen for light curtains



Main	
Range of product	Telemecanique Safety light curtains XUSL
Accessory / separate part categor	Mounting and fixing accessories
Accessory / separate part type	Fixing accessory
Product compatibility	XUSZWPE
Accessory / separate part destination	Protective cover

C		L
Comp	iemen	tary

Ambient air temperature for operation	-3055 °C	
	-22131 °F	
Ambient air temperature for storage	-3070 °C -22158 °F	
Kit composition	4 x stainless steel fixation clamp(s) 4 x stainless steel end clamp(s)	
Net weight	0.15 kg	

Packing Units


•		
Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	7.000 cm	
Package 1 Width	10.000 cm	
Package 1 Length	17.000 cm	
Package 1 Weight	185.000 g	
Unit Type of Package 2	S02	
Number of Units in Package 2	8	
Package 2 Height	15 cm	
Package 2 Width	30 cm	
Package 2 Length	40 cm	
Package 2 Weight	1.913 kg	

Offer Sustainability

Yes
WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
sustainability@tesensors.com

Mounting and Clearance

Various Stages in the Protective Screen Assembly

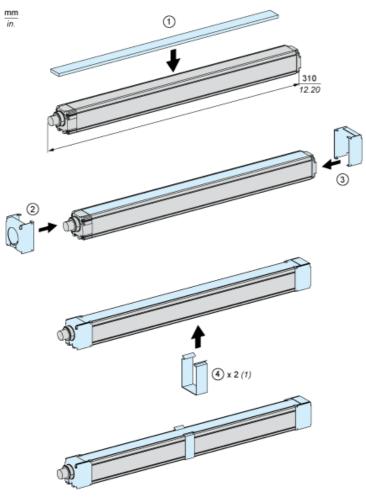

(1) Depending on the length