


XZCC12FDM40V

female, M12, 4-pin, straight connector - cable gland Pg 7

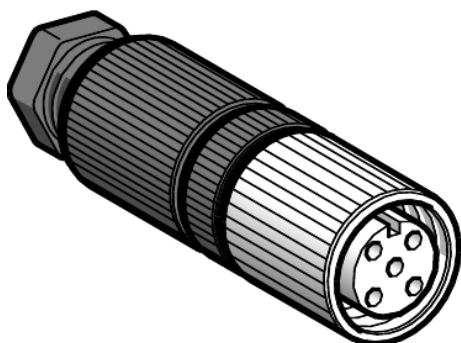

Main

Range of product	Telemecanique Cabling components
Accessory / separate part categor	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight female connector M12, 4 pins
Collar material	Metal
Status LED	Without
Cable connection	Axial vampire clip / wire size <0.5 mm ²

Complementary

Cable gland type	Pg 7
Cable connector fixing	Screw-on
[Ue] rated operational voltage	< 60 V AC/DC
[In] rated current	4 A
Enclosure material	Plastic
Minimum insulating resistance	1 GΩ
Contact resistance	8000 μOhm
Net weight	0.015 kg

Environment

IP degree of protection	IP67
Ambient air temperature for operation	-25...70 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Contractual warranty

Warranty	18 months
----------	-----------

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither TWSS Holding nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.