



## Main

Range of product	Telemecanique Cabling components
Accessory / separate part categor	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight male connector M23, 19 pins
Collar material	Metal
Status LED	Without
Cable connection	Solder terminal / wire size <1 mm² / clamping capacity 9...12 mm

## Complementary

Cable gland type	Pg 13.5
Cable connector fixing	Screw-on
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	7.5 A
Enclosure material	Metal
Minimum insulating resistance	10000000 GΩ
Contact resistance	5000 µOhm
Net weight	0.08 kg

## Environment

IP degree of protection	IP65
Ambient air temperature for operation	-25...110 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.000 cm
Package 1 Width	7.000 cm
Package 1 Length	3.000 cm
Package 1 Weight	101.000 g
Unit Type of Package 2	S01
Number of Units in Package 2	50
Package 2 Height	15 cm
Package 2 Width	15 cm
Package 2 Length	40 cm
Package 2 Weight	5.223 kg

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>


## Contractual warranty

Warranty	18 months
----------	-----------

---

Dimensions

---

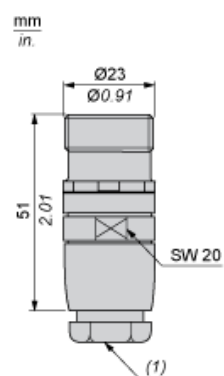

(1) Cable gland: no. 13 metal (Pg 13.5)

---

## Connections and Schemes

---

