

# XZCE03M125M

Adaptor, metal, tapped hole M20, for male connector, M12, 5 wire



## Main

Accessory / separate part designation	5-wire connector adaptor
Accessory / separate part categor	Cabling accessories
Accessory / separate part type	Connector adaptor
Cable composition	4 x 0.34 mm <sup>2</sup> + 1 x 0.5 mm <sup>2</sup>
Thread type	M20 x 1.5
[In] rated current	4 A

## Complementary

Cable length	100 mm
Total number of wires	5
Electrical connection	1 male connector M12 5 straight
Cable connector fixing	Screw-on
Body material	Metal
Insulation resistance	> 1000000000 Ohm
Maximum resistance across terminals	5000 mOhm
[Ue] rated operational voltage	30 V AC 36 V DC
Net weight	0.025 kg

## Environment

IP degree of protection	IP67
Ambient air temperature for operation	-25...80 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.500 cm
Package 1 Width	5.000 cm
Package 1 Length	12.000 cm
Package 1 Weight	26.000 g
Unit Type of Package 2	S01
Number of Units in Package 2	50
Package 2 Height	15.000 cm
Package 2 Width	15.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	1.634 kg


## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

## Contractual warranty


Warranty	18 months
----------	-----------

## Dimensions

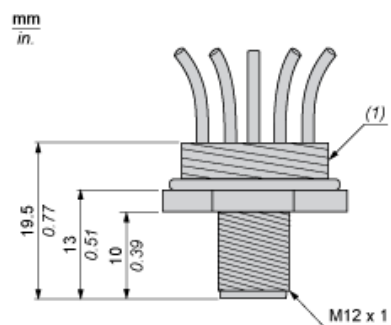

(1) Thread size M20 x 1.5

## Connections and Schemes



BN : Brown  
BK : Black  
BU : Blue  
Y/G : Yellow / Green  
WH : White