



## Main

Range of product	Telemecanique Cabling components
Accessory / separate part categor	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

## Complementary

Electrical connection	Straight female connector 7/8", 5 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	5 m
Cable outer diameter	8.1 mm
Cable composition	5 x 1.5 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	600 V AC 600 V DC
[In] rated current	10 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	1 kg

## Environment

IP degree of protection	IP67
Product certifications	cULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1


## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

## Contractual warranty

Warranty	18 months
----------	-----------

## Dimensions

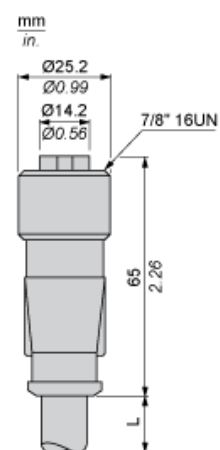


L : Length of cable

---

## Connections and Schemes

---

### Connectors



RD : Red  
WH : White  
BK : Black  
GN : Green  
OR : Orange