XZCR2711037T2

Jumper cable XZ, male straight M8 3 pin, female straight M12 5 pin, PUR 2 m



Main

Accessory / separate part categor	Cabling accessory
Accessory / separate part type	Jumper cable

Complementary

o o in promormary		
Jumper cable end 1	M8 male 3 pins straight connector with screw-on and clip-on	
Jumper cable end 2	M12 female 5 pins straight connector with screw-on	
Collar material	Metal	
Cable composition	3 x 0.34 mm²	
Cable length	2 m	
Wire insulation material	PUR	
Cable outer diameter	5.2 mm	
[Ue] rated operational voltage	45 V DC 60 V AC	
[In] rated current	4 A	
Insulation resistance	>= 1000 MOhm	
Maximum resistance across terminals	5000 mOhm	
Net weight	0.093 kg	

Environment

IP degree of protection	IP69K IP65 IP67
Product certifications	cULus
Ambient air temperature for operation	-3590 °C static -590 °C flexing
Ambient air temperature for storage	-35100 °C

Packing Units

PCE	
1	
1.000 cm	
14.000 cm	
14.000 cm	
70.000 g	
S02	
40	
15.000 cm	
30.000 cm	
	1 1.000 cm 14.000 cm 14.000 cm 70.000 g S02 40 15.000 cm


Package 2 Length	40.000 cm
Package 2 Weight	3.154 kg
Offer Sustainability	
Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
For all Reach Rohs enquiries contact us at	sustainability@tesensors.com

18 months



Warranty

Dimensions

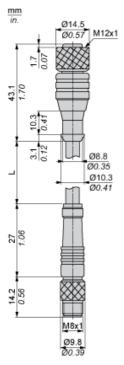

L: Length of cable

Product data sheet Connections and Schema

XZCR2711037T2

Connections and Schemes

