


# XCKZ015

Limit switch contact block, Limit switches XC Standard, XCKZ, 1 C/O snap action, silver plated

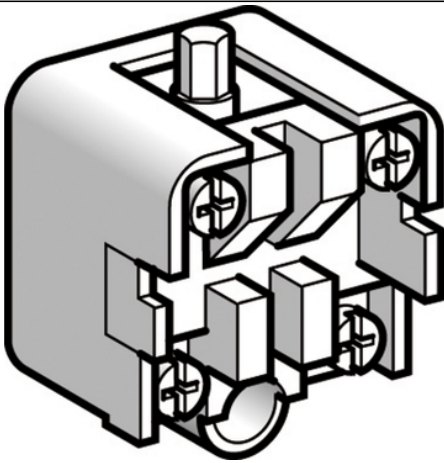

## Main

|                               |  |
|-------------------------------|--|
| Range of product              | Telemecanique Limit switches XC Standard |
| Series name                   | Standard format                          |
| Product or component type     | Limit switch contact block               |
| Device short name             | XCKZ                                     |
| Associated body               | ZC2JC15                                  |
| Number of poles               | 1  |
| Contact operation             | Snap action                              |
| Contacts type and composition | 1 C/O                                    |

## Complementary

|                                     |   |
|-------------------------------------|---|
| Product compatibility               | XC2J  |
| Electrical connection               | Screw-clamp terminals, clamping capacity: 1 x 0.5...2 x 2.5 mm <sup>2</sup>   |
| Contacts insulation form            | Za  |
| Contacts material                   | Silver plated contacts  |
| Positive opening                    | Without   |
| Minimum actuation speed             | 0.01 mm/s   |
| Contact code designation            | A300, AC-15 (U <sub>e</sub> = 240 V), I <sub>e</sub> = 3 A conforming to EN/IEC 60947-5-1 appendix A<br>Q300, DC-13 (U <sub>e</sub> = 250 V), I <sub>e</sub> = 0.27 A conforming to EN/IEC 60947-5-1 appendix A   |
| Maximum resistance across terminals | 25 mOhm conforming to IEC 60255-7 category 3  |
| [Ui] rated insulation voltage       | 500 V conforming to IEC 60947-5-1<br>300 V conforming to CSA C22.2 No 14  |
| Short-circuit protection            | 10 A cartridge fuse, type gG  |
| Electrical durability               | 5000000 Cycles, DC-13 120 V, 4 W, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C<br>5000000 Cycles, DC-13 24 V, 10 W, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C<br>5000000 cycles, DC-13 48 V, 7 W, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C |

## Packing Units

|                              |        |
|------------------------------|--------|
| Unit Type of Package 1       | PCE    |
| Number of Units in Package 1 | 1      |
| Package 1 Height             | 3.5 cm |
| Package 1 Width              | 4.5 cm |
| Package 1 Length             | 6.0 cm |
| Package 1 Weight             | 50.0 g |

## Offer Sustainability

|  |   |
|--|---|
| California proposition 65                  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| For all Reach Rohs enquiries contact us at | <a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>  |

## Contractual warranty

---

Warranty

18 months

---