

# XUJB06031H60

Photoelectric sensors XU, XUJ, reflex, kit, Sn 6 m, 24...240VAC/DC, terminals



## Main

Range of product	Telemecanique Photoelectric sensors XU
Series name	Application tertiary sector
Electronic sensor type	Photo-electric sensor
Product specific application	Buzzer signalling
Sensor name	XUJ
Sensor design	Compact
Material	Plastic
Detection system	Reflex
Emission	Infrared
[Sn] nominal sensing distance	6 m with reflector Ø 80 mm
Wiring technique	4-wire
Sale per indivisible quantity	1

## Complementary

Enclosure material	PEI
Type of output signal	Discrete
Output type	Relay
Discrete output function	1 NO
Output function governance	Dark
Electrical connection	Screw-clamp terminals, maximum : 1 x 1.5 mm²
Cable entry	1 entry for Pg 9 cable gland
Signalling function	Buzzer
Status LED	Output state: 1 LED (yellow)
Supply circuit type	AC/DC
[Us] rated supply voltage	24...240 V AC 24...48 V DC
Supply voltage limits	20...264 V AC 20...60 V DC
Output voltage	<= 250 V AC <= 30 V DC
Switching capacity in mA	0.5 A (cos φ = 0.4 for 0.5 million cycles at 1 operating cycle per second at 250 V) 2 A (cos φ = 1 for 1 million cycles at 1 operating cycle per second)
Switching frequency	<= 20 Hz
Maximum power consumption in W	2 W
Time delay range	0.3...3 s
Maximum delay first up	60 ms
Maximum delay response	25 ms
Maximum delay recovery	25 ms
Electrical durability	1000000 Cycles, switching capacity: 2000 mA, cos f = 1, operating rate <60 cyc/mn at 250 V 500000 cycles, switching capacity: 500 mA, cos f = 0.4, operating rate <60 cyc/mn at 250 V
Depth	69 mm
Height	85 mm
Width	28 mm
Net weight	0.33 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the company. This information is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither TWSS Holding nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Product certifications	CE
Ambient air temperature for operation	-25...55 °C
Ambient air temperature for storage	-40...70 °C
Vibration resistance	7 gn, amplitude = +/- 1.5 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 11 ms) conforming to IEC 60068-2-27
IP degree of protection	IP40 double insulation conforming to IEC 60529

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6 cm
Package 1 Width	18 cm
Package 1 Length	20 cm
Package 1 Weight	339 g
Unit Type of Package 2	S04
Number of Units in Package 2	24
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	8.941 kg

## Offer Sustainability


WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

## Contractual warranty

Warranty	18 months
----------	-----------


## Dimensions

### Sensor Dimensions

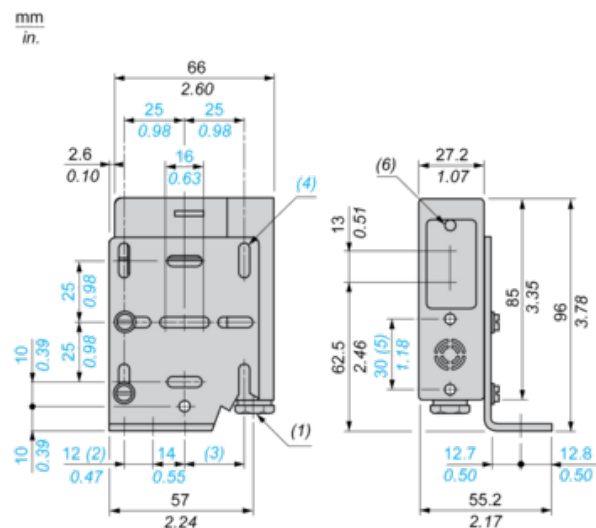

- (1) 9P cable gland
- (2) 2 elongated holes  $\varnothing$  6.5 x 10
- (3) 1 elongated hole  $\varnothing$  6.5 x 24
- (4) 8 elongated holes  $\varnothing$  4.2 x 10
- (5) Front fixing ( $\varnothing$  4 screws and inserts included)
- (6) Yellow LED

### Bracket Fixing



- (1) 2 elongated holes  $\varnothing$  6.5 x 16.5
- (2) 1 elongated hole  $\varnothing$  6.5 x 30.5

---

## Wiring Schemes

---


### NO Function

Object present



### Terminal Connections


1 NO relay output



## Curves


### Detection Curve

Reflex System

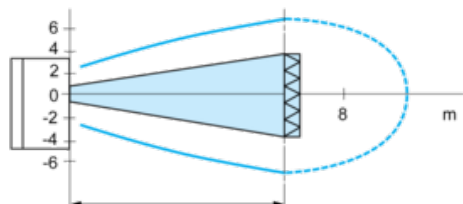

### Excess Gain Curves (Ambient Temperature: + 25° C)

Infrared reflex system with reflector XUZC80

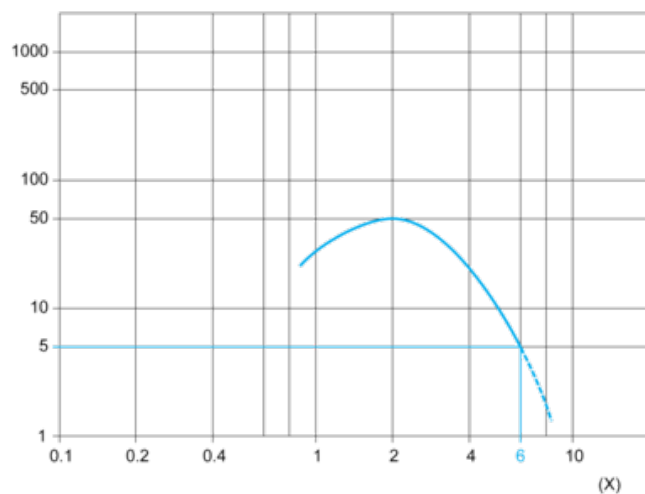

(x) Distance (mm)